

## MRO-2500 Reverse Osmosis System



### Marlo 2500 GPD Reverse Osmosis System

- Fully Equipped and Customizable
- Higher Recovery Rates
- Lower Energy Consumption
- High Flow Low-Energy Membranes
- Lower Maintenance
- Compact Space Saving Design
- Individually Wet Tested and Sanitized
- 1-Year Manufacturer's Warranty
- Made in the U.S.A.

**Marlo Reverse Osmosis Systems** feature an excellent pre-treatment design, high quality components and offer high performance. Marlo systems are designed for higher recovery rates and minimum energy consumption.

Experience greater savings with lower maintenance and operation costs when you install a **Marlo Reverse Osmosis System**.



# MRO-2500 Commercial Reverse Osmosis System

## Standard Features:

- **Membrane:** Three 2.5" x 40" TFC HF1 Membranes – For maximum rejection of impurities and high flow.
- **Membrane Housing:** Three 2.5" x 40" PVC Membrane Housings.
- **Pump:** One 1001 Fluid-O-Tech® 5.3 GPM Brass Rotary Vane Pump – Directly couples to the motor and is designed for continuous high pressures.
- **Motor:** One 3/4 HP Motor 110 or 220 Volt 50 or 60 Hertz
- **Frame:** One Aluminum White Powder Coated Frame – Corrosion resistant and light weight.
- **Flow Meters:** One Product (0-2 GPM) & One Waste (0-5 GPM) PuroTech™ Flow Meters – Enables operator to accurately adjust product to waste ratio and monitor systems performance.
- **Concentrate Re-Circulate:** This feature offers a higher recovery rate for the system by taking a % of the waste water and feeding it back through the system.
- **Sediment Filter:** One 4.5" x 20" 5 Micron Sediment Filter – Removes sediments and protects the system.
- **Carbon Block:** One 4.5" x 20" 10 Micron Carbon Block – Removes Chlorine, odor, and taste from feed water.
- **Filter Housing:** Two 4.5" x 20" Polypropylene Filter Housings – Offers durability and improved sealing capabilities.
- **Pressure Gauges:** One 2.5" 0-300 PSI Panel Mount Glycerin Filled Gauge and Two 1.5" 0-160 PSI Bottom Mount Dry Gauges – For monitoring the system's operating pressure and the filter & carbon operating pressure.
- **Low Pressure Switch:** One Low Pressure Switch – Safety device which protects the pump from running dry when there is insufficient feed water pressure.
- **Solenoid Valve:** One Solenoid Valve with Manual Override 110 or 220 Volt 50 or 60 Hertz – Assists with the on/off functionality of the system.
- **Manual Flush Valve:** One 1/4" Brass Needle Valve – Regulates the product to waste ratio (system's recovery).
- **Switch:** One Manual On and Off Switch
- **Easy Maintenance & Operation:** Marlo reverse osmosis systems feature a compact design and have all of their components strategically located for easy access and inspection.



## Optional Features:


- **Stainless Steel Pump:** Upgrades feed pump material from brass to 304 stainless steel.
- **Stainless Steel Housings:** Three 2.5" x 40" Stainless Steel Membrane Housings 3/8" FNPT
- **High Pressure Switch:** One High Pressure Switch – Automatically starts the system when the tank pressure falls below 40 psi and stops when the pressure reaches 60 psi.
- **TDS Meter:** One Panel Mount TDS Meter – Provides you with accurate readings of the product water quality.
- **Float Switch:** One Normally Closed Float Switch – For atmospheric storage tank applications.

## System Specifications

Model	MRO-2500-2.5	Design	Vertical
Gallons Per Day	2500 @ 77°F	Dimensions (Approx.)	19" x 23" x 46"
Auto-Flush	N/A	Element Size (in.)	2540 TFC HF1
Elements (Qty.)	3	Motor HP	3/4
Voltage	110 or 220	Hertz	50 or 60
Feed Connection	3/4"	Product Connection	3/8"
Waste Connection	3/8"	Weight (Approx.)	115 lbs.

## System Operating Specifications

Minimum Feed Pressure	35 psi	Minimum NaCl % Rejection	96%
Minimum Feed (GPM)	4	Maximum Hardness	Softened
Maximum TDS	2000 ppm	Operating Pressure	150 psi
Nominal NaCl % Rejection	98.5%	Maximum Feed (GPM)	10
pH Range	3 - 11	Maximum Temperature	105 °F

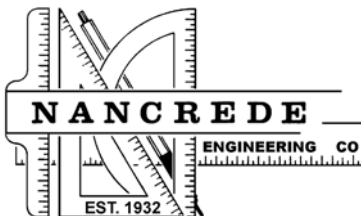

5356 Hillside Avenue  
 Indianapolis, IN 46220  
 P: +1 888-56-Water (569-2837)  
 F: +1 317-255-4727  
 info@nancrede.com  
 www.nancrede.com